

ES2000



0051
0051-CPR-1316
0051-CPR-1317
0051-CPR-2035
0051-CPR-2036

ANALOGUE ADDRESSABLE VISUAL/AUDIBLE ALARM INDICATORS, WALL MOUNT



ES20xxRE


ES20xxWE

Addressable visual/audible-alarm indicators for wall mounting, IP65 protection rated.

Volume, flash intensity and sound sequences can be selected from the 14 tones on-board the device (and 16 voice messages available in 8 different languages, only for versions with the voice function). For models with the voice function, it is also possible to customize tones/voice messages by means of the EDRV2000.

The device is powered via the loop but is equipped with terminals for an optional separate power input.

Available in red or white casing.

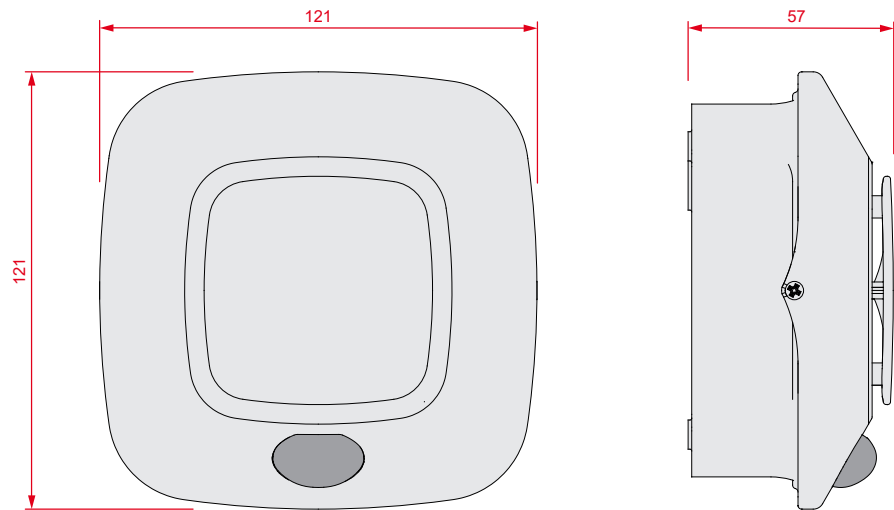

Main features


	ES2010	ES2011	ES2020	ES2021	ES2030	ES2050
Operating voltage	18 - 30V $\overline{\text{ac}}$	20 - 30V $\overline{\text{ac}}$	18 - 30V $\overline{\text{ac}}$	20 - 30V $\overline{\text{ac}}$	18 - 30V $\overline{\text{ac}}$	18 - 30V $\overline{\text{ac}}$
Stand-by current draw	200 μ A	500 μ A	200 μ A	500 μ A	200 μ A	200 μ A
Maximum current draw	25mA	5mA	40mA	23mA	25mA	40mA
Installation method	Wall mount					
Maximum installation height	-	-	3.5 m	3.5 m	-	3.5 m
Light coverage according to EN54-23	-	-	W-3.5-10.2 O-3.5-10.5-10.0	W-3.5-7 O-3.5-8-7	-	W-3.5-10.2 O-3.5-10.5-10.0
Flash frequency	-	-	0.5Hz	0.5Hz	-	0.5Hz
Flash color	-	-	White	White	-	White
Number of selectable tones	14	14	14	14	104	104
Sound pressure at 1 mt.	101dB					
IP Protection grade	IP65 (IP21 EN54-3 certified)					
Operating temperature	from -10 to 55°C					
Synchronization	Yes					
Multicolor indicating LED	Yes					
Built-in short-circuit isolator (EN54-17)	Yes					
Dimensions	121 x 121 x 57 mm					
Weight	150 g					

ES2000




0051
0051-CPR-1316
0051-CPR-1317
0051-CPR-2035
0051-CPR-2036

FLASH COVERAGE VOLUME

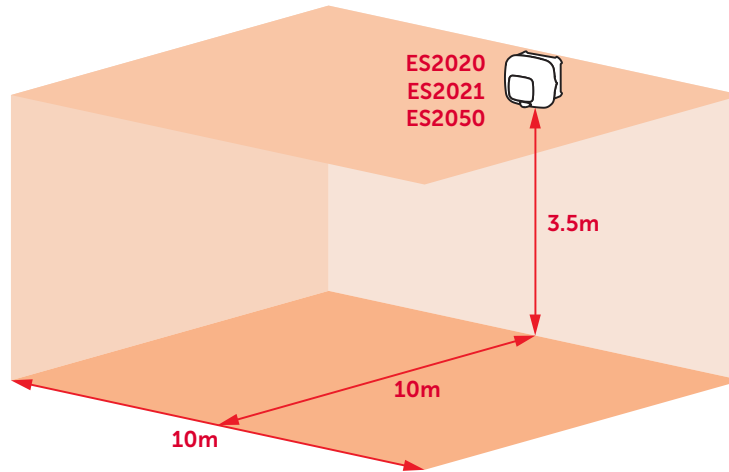

CONFIGURATION DIAGRAM

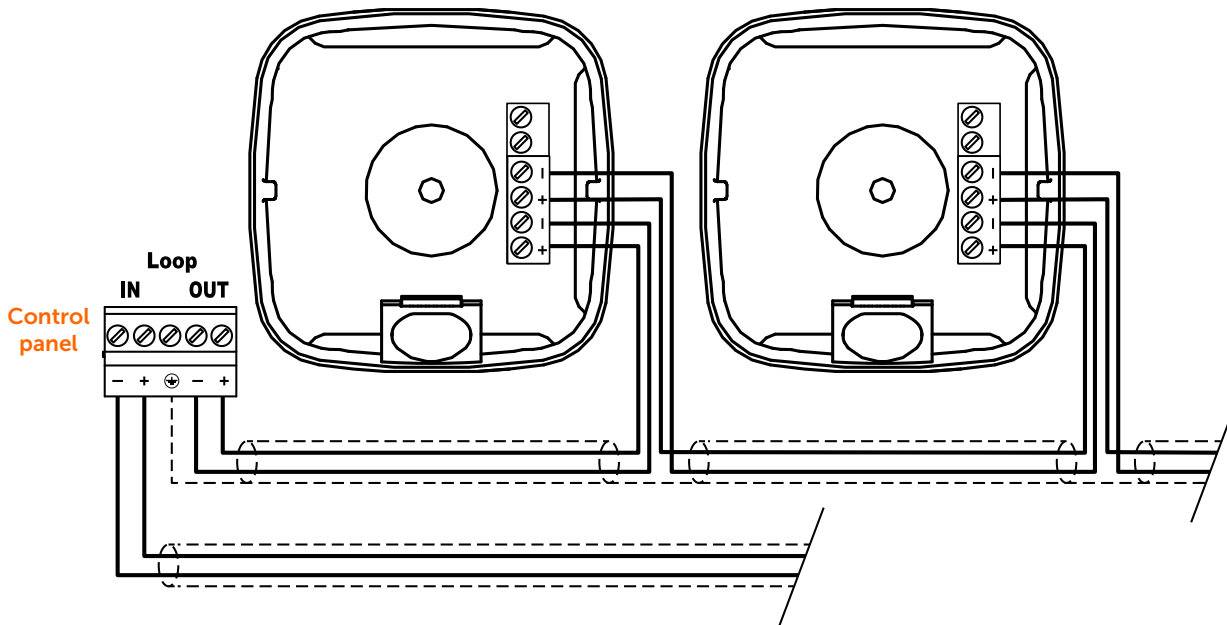

ORDER CODES

- ES2010RE** Audible alarm indicator, wall mount, addressable, in red casing
- ES2010WE** Audible alarm indicator, wall mount, addressable, in white casing
- ES2011RE** Audible alarm indicator, wall mount, addressable, in red casing, low power consumption
- ES2011WE** Audible alarm indicator, wall mount, addressable, in white casing, low power consumption
- ES2020RE** Visual/Audible alarm indicator, wall mount, addressable, in red casing
- ES2020WE** Visual/Audible alarm indicator, wall mount, addressable, in white casing
- ES2021RE** Visual/Audible alarm indicator, wall mount, addressable, in red casing, low power consumption
- ES2021WE** Visual/Audible alarm indicator, wall mount, addressable, in white casing, low power consumption
- ES2030RE** Audible alarm indicator with voice alert, wall mount, addressable, in red casing
- ES2030WE** Audible alarm indicator with voice alert, wall mount, addressable, in white casing
- ES2050RE** Visual/Audible alarm indicator with voice alert, wall mount, addressable, in red casing
- ES2050WE** Visual/Audible alarm indicator with voice alert, wall mount, addressable, in white casing



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature